

HUBER - Umwälzpumpen Circulateurs

H 32
H 32 D

Betriebstemperatur:
Température de service: max. +110 °C


Betriebsdruck
Pression de service

H 32 : max. 6 bar
H 32 D: max. 10 bar

Typ Type	DN	1/min	Aufnahme Consommation W	Nennstrom in A Intensité nominale A			Kondensator Condensateur	
				3×380 V	3×220 V	1×220 V	µF	V~
H 32-1	5/4"-1"	1400	90	0,30	0,48	0,48	6	240
H 32-2	5/4"-1"	1400	75	0,30	0,48	0,48	6	240
H 32-3	5/4"-1"	1400	60	0,30	0,48	0,48	6	240
H 32-4	5/4"-1"	1400	50	0,30	0,48	0,48	6	240

H 32 D = Flanschen DN 32/PN 16 / brides DN 32/PN 16

Typenschild ist massgebend / Plaque signalétique est prépondérante

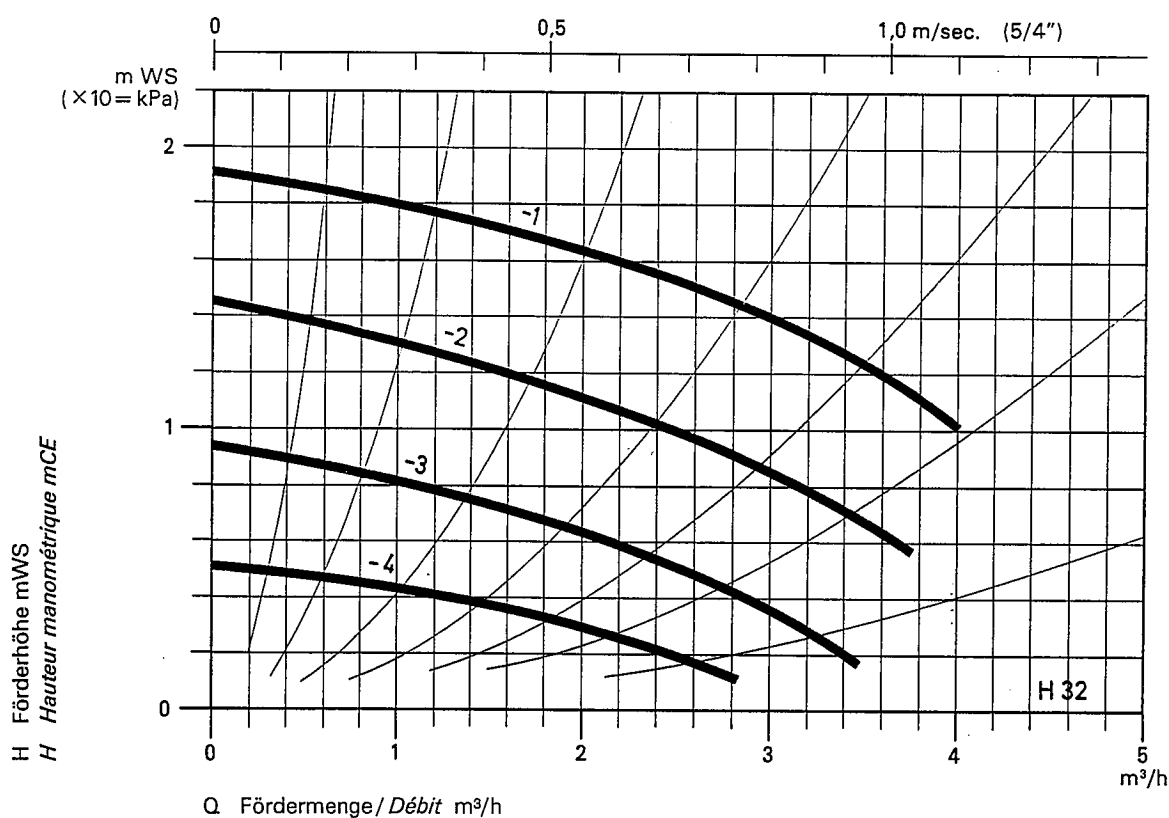

Abmessungen / Dimensions

Type: PN		H 32: 6	H 32 D: 16
A	mm	160	206
B	mm	159	159
C	mm	-	70
D	mm	44	44
E	mm	63	63
F	mm	82	82
G	kg	8	10

